

Rotary actuator for butterfly valves

- Torque motor 90 Nm
- Nominal voltage AC 24...240 V / DC 24...125 V
- Control modulating, communicative, hybrid
- With 2 integrated auxiliary switches
- Conversion of sensor signals
- Communication via BACnet MS/TP, Modbus RTU, Belimo-MP-Bus or conventional control



Picture may differ from product

Technical data

Electrical data	Nominal voltage	AC 24...240 V / DC 24...125 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.2...264 V / DC 19.2...137.5 V
	Power consumption in operation	20 W
	Power consumption in rest position	7 W
	Power consumption for wire sizing	with 24 V 20 VA / with 240 V 55 VA
	Auxiliary switch	2x SPDT, 1x 10° / 1x 0...90° (default setting 85°)
	Switching capacity auxiliary switch	1 mA...3 A (0.5 A inductive), DC 5 V...AC 250 V
	Connection protective earth	Terminals 0.5...2.5 mm ² , copper conductors only
	Connection supply	Terminals 0.5...2.5 mm ² , copper conductors only
	Connection control	Terminals 0.34...1.5 mm ² , copper conductors only
	Connection auxiliary switch	Terminals 0.5...2.5 mm ² , copper conductors only
	Parallel operation	Yes (note the performance data)
Data bus communication	Communicative control	BACnet MS/TP Modbus RTU MP-Bus
	Number of nodes	BACnet / Modbus see interface description MP-Bus max. 16
Functional data	Torque motor	90 Nm
	Operating range Y	2...10 V
	Input impedance	50 kΩ for 2...10 V (0.2 mA), 500 Ω for 4...20 mA
	Operating range Y variable	0.5...10 V 4...20 mA
	Position feedback U	2...10 V
	Position feedback U note	max. 500 Ohm for 4...20 mA
	Position feedback U variable	0.5...10 V 4...20 mA
	Position accuracy	±5%
	Manual override	hand crank
	Running time motor	35 s / 90°
	Running time motor variable	20...120 s

Functional data	Sound power level, motor	65 dB(A)
	Position indication	Mechanical, integrated
Safety data	Protection class IEC/EN	I, protective earth (PE)
	Protection class UL	I, protective earth (PE)
	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP66/67
	Degree of protection NEMA/UL	NEMA 4X
	Housing	UL Enclosure Type 4X
	EMC	CE according to 2014/30/EU
	Low voltage directive	CE according to 2014/35/EU
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
	UL Approval	cULus according to UL60730-1A, UL60730-2-14 and CAN/CSA E60730-1 The UL marking on the actuator depends on the production site, the device is UL-compliant in any case
	Type of action	Type 1
	Overvoltage category	III
	Rated impulse voltage supply	4 kV
	Rated impulse voltage control	0.8 kV
	Rated impulse voltage auxiliary switch	4 kV
	Pollution degree	3
	Ambient humidity	Max. 100% RH
	Ambient temperature	-30...50°C [-22...122°F]
	Storage temperature	-40...80°C [-40...176°F]
	Software Class	A
	Servicing	maintenance-free
Mechanical data	Connection flange	F07 (F05/F10 only with accessory)
Weight	Weight	3.7 kg

Safety notes



- This device has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- Caution: Mains voltage!
- The device has a protective earthing. Incorrect connection of the protective earth can lead to hazards due to electrical shock.
- Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied with during installation.
- Apart from the wiring compartment, the device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device is not designed for applications where chemical influences (gases, fluids) are present or for utilisation in corrosive environments in general.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.
- The two switches integrated in the actuator are to be operated either on mains voltage or on safety extra-low voltage. The combination mains voltage/safety extra-low voltage is not permitted.
- In case of maintenance work on the hydronic system, the correct valve position must be set via the control signal. Additionally, the actuator has to be disconnected from the power supply. The hand crank and manual override must not be used as a safety measure to maintain the set valve position.

Product features

Fields of application	The actuator is particularly suitable for utilisation in outdoor applications and is protected against the following weather conditions: - UV radiation - Dirt / Dust - Rain / Snow - Air humidity
Converter for sensors	Connection option for two sensors (passive, active or switching contacts). In this way, the analogue sensor signal can be easily digitised and transferred to the bus systems BACnet, Modbus or MP-Bus.
Internal heating	An internal heater prevents condensation buildup. Thanks to the integrated temperature and humidity sensor, the built-in heater automatically switches on/off.
Configurable device	The factory settings cover the most common applications. Belimo Assistant 2 is required for configuration via Near Field Communication (NFC) and simplifies commissioning. Moreover, Belimo Assistant 2 provides a variety of diagnostic options.
Combination analogue - communicative (hybrid mode)	With conventional control by means of an analogue control signal, BACnet or Modbus can be used for the communicative position feedback
Simple direct mounting	Simple direct mounting on the butterfly valve. The mounting orientation in relation to the butterfly valve can be selected in 90° (angle) increments.
Manual override	The valve can be manually operated using a hand crank. Unlocking is carried out manually by removing the hand crank.
High functional reliability	The actuator is overload protected, requires no limit switches and automatically stops when the end stop is reached.

Product features

Innovative motorisation	The actuator uses the powerful Belimo M600 microchip in combination with the INFORM method. It provides the full starting torque from a standstill with high precision (sensorless INFORM-Drive by Prof. Schrödl).
Flexible signalling	The actuator has one auxiliary switch with a fixed setting (10°) and one adjustable auxiliary switch (0...90°).

Accessories

	Tools	Description	Type
		Service tool for wired and wireless setup, on-site operation and troubleshooting. Converter Bluetooth / NFC	Belimo Assistant 2 ZIP-BT-NFC
	Mechanical accessories	Description	Type
		Position indicator and tappet shaft, F07, square 45° offset, SW 17, DN 125...150 Position indicator and tappet shaft, F05, square 45° offset, SW 14, DN 50...100 Tappet shaft, F07, square 45° offset, SW 17 RetroFIT+ adapter kit, F07/F10 (incl. screws F07), flat head/square, SW 17 RetroFIT+ adapter kit, F07/F10 (incl. screws F07), square 45° offset, SW 14 Adapter kit with spacer ring, F07, square 45° offset, SW 17 RetroFIT+ adapter kit, F07/F05/F10 (incl. screws F07), flat head/square, SW 14 RetroFIT+ adapter kit, F05/F07/F10 (incl. screws F05), flat head/square, SW 14 RetroFIT+ adapter kit, F07/F10 (incl. screws F07), square 45° offset, SW 18 RetroFIT+ adapter kit, F07/F10 (incl. screws F07), flat head/square, SW 16 RetroFIT+ adapter kit, F07/F05/F10 (incl. screws F07), flat head/square, SW 11 RetroFIT+ adapter kit, F07/F05/F10 (incl. screws F07), flat head/square, SW 12.7 RetroFIT+ adapter kit, F07/F10 (incl. screws F07), square 45° offset, SW 11 Hand crank for JR actuator Spacer ring, F04/F05, Height 22 mm Spacer ring, F05/F07, Height 23.5 mm	ZJR01 ZJR03 ZPR02 ZPR05 ZPR06 ZPR08 ZPR09 ZPR10 ZPR11 ZPR12 ZPR13 ZPR14 ZPR15 ZJR20 ZRI-001 ZRI-002
	Sensors	Description	Type
		Duct/Immersion sensor Temperature 50 mm x 6 mm Ni1000 Duct/Immersion sensor Temperature 50 mm x 6 mm Pt1000 Duct/Immersion sensor Temperature 100 mm x 6 mm Ni1000 Duct/Immersion sensor Temperature 100 mm x 6 mm Pt1000 Duct/Immersion sensor Temperature 150 mm x 6 mm Ni1000 Duct/Immersion sensor Temperature 150 mm x 6 mm Pt1000 Duct/Immersion sensor Temperature 200 mm x 6 mm Ni1000 Duct/Immersion sensor Temperature 200 mm x 6 mm Pt1000 Duct/Immersion sensor Temperature 300 mm x 6 mm Ni1000 Duct/Immersion sensor Temperature 300 mm x 6 mm Pt1000 Duct/Immersion sensor Temperature 450 mm x 6 mm Ni1000 Duct/Immersion sensor Temperature 450 mm x 6 mm Pt1000	01DT-1CH 01DT-1BH 01DT-1CL 01DT-1BL 01DT-1CN 01DT-1BN 01DT-1CP 01DT-1BP 01DT-1CR 01DT-1BR 01DT-1CT 01DT-1BT



Electrical installation

Caution: Mains voltage!

Parallel connection of other actuators possible. Observe the performance data.


The wiring of the line for BACnet MS/TP / Modbus RTU is to be carried out in accordance with applicable RS-485 regulations.

AC 24...240 V / DC 24...125 V

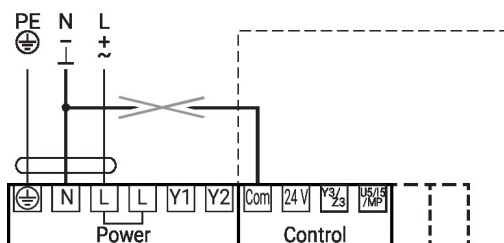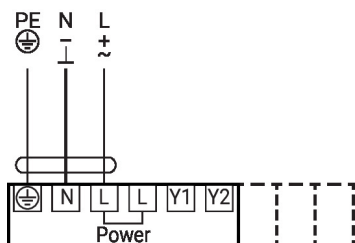


Power supply must not be connected to the signal terminals!

Modulating control

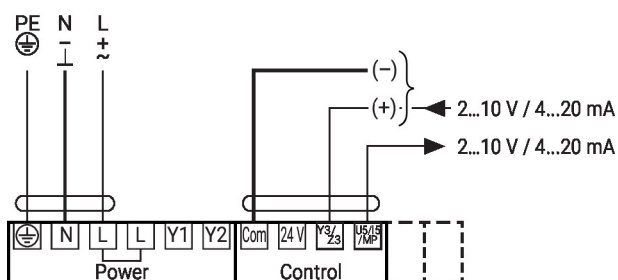


Parallel circuit 2...10 V

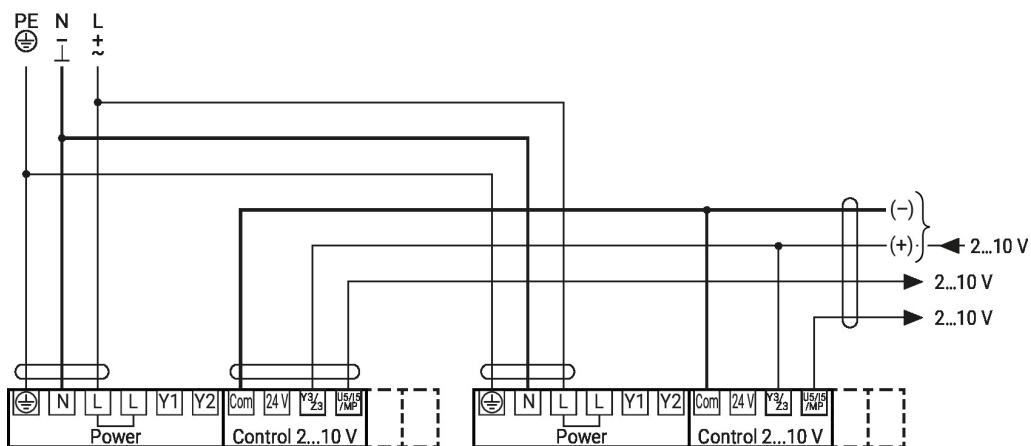

Electrical installation


Auxiliary switch

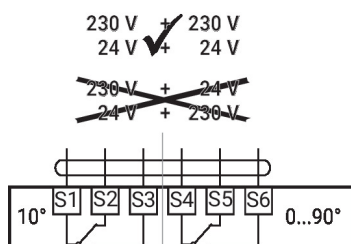

Further electrical installations

MP-Bus

MP-Bus Network topology




There are no restrictions for the network topology (star, ring, tree or mixed forms are permitted).
Supply and communication in one and the same 3-wire cable


- no shielding or twisting necessary
- no terminating resistors required

Functions with specific parameters (configuration necessary)


Control open/close

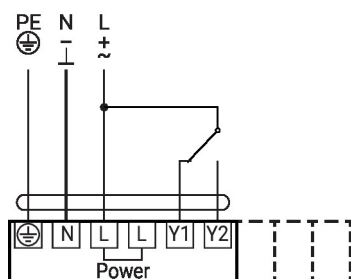

Control open/close




Control 3-point

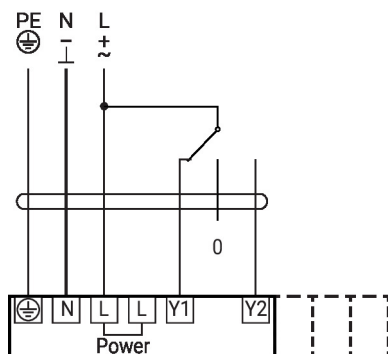


Functions with specific parameters (configuration necessary)


Parallel circuit 4...20 mA

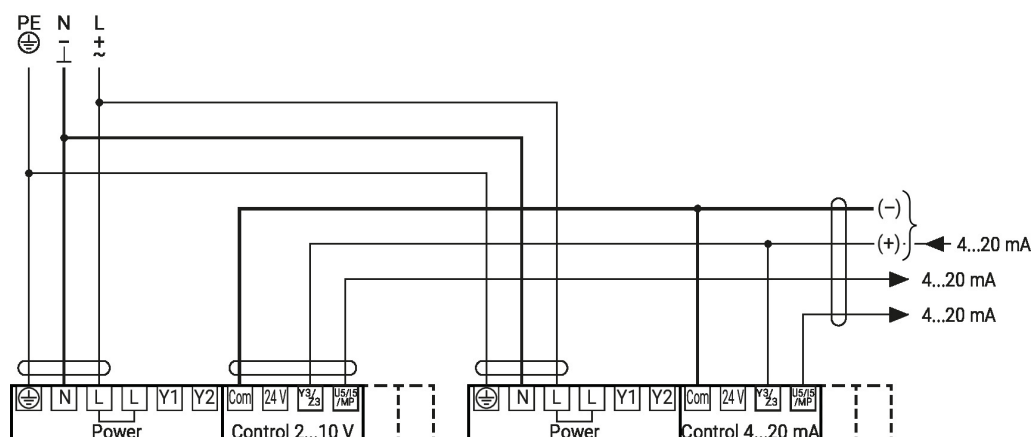


Connection on the MP-Bus

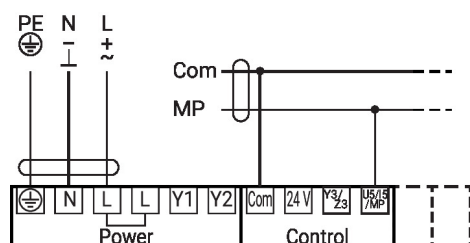

Connection BACnet MS/TP / Modbus RTU

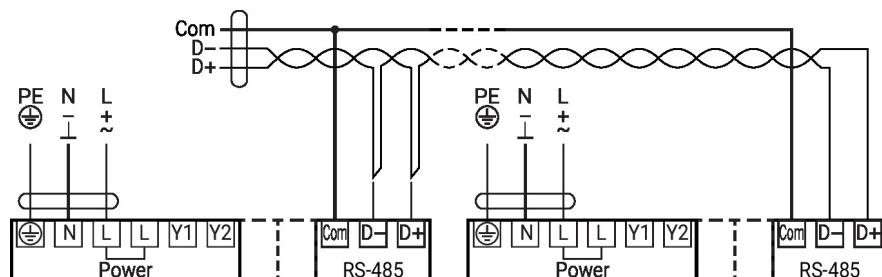


Connection BACnet MS/TP / Modbus RTU with analogue setpoint (hybrid mode)

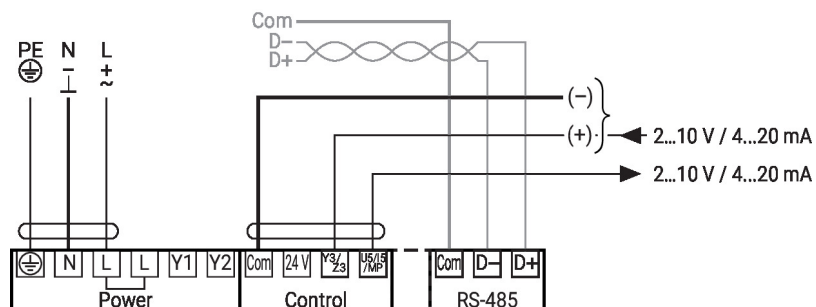

Further electrical installations


Functions with specific parameters (configuration necessary)

Connection BACnet MS/TP / Modbus RTU with analogue primary/secondary operation

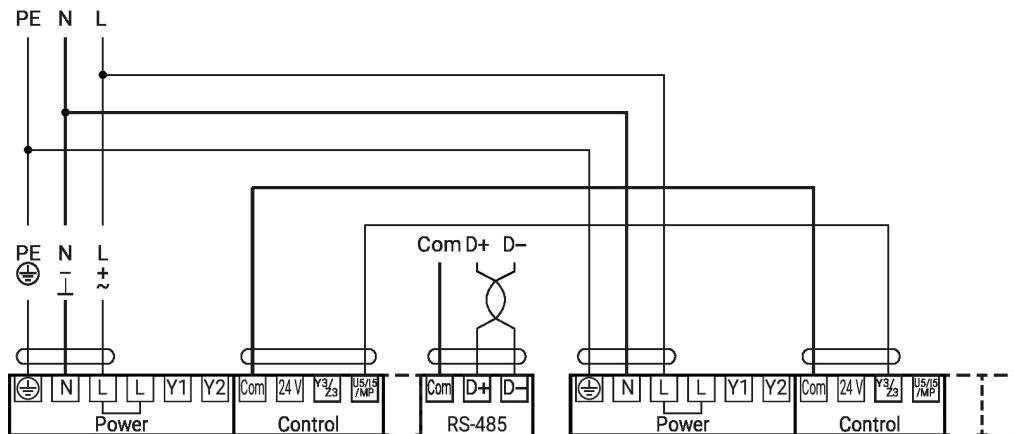

Sensor connection

Connection of active sensors (BACnet MS/TP / Modbus RTU / MP-Bus)

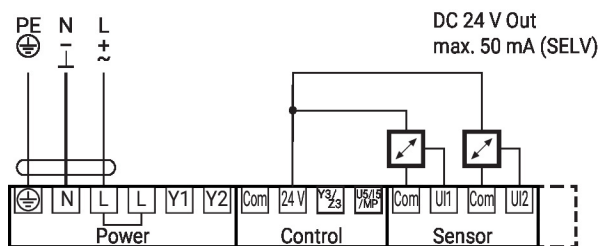

Possible input voltage range:


0...10 V

Resolution 5 mV

To capture for example:

- Active temperature sensors
- Flow sensors
- Pressure / differential pressure sensors

Switching contact connection (BACnet MS/TP / Modbus RTU / MP-Bus)

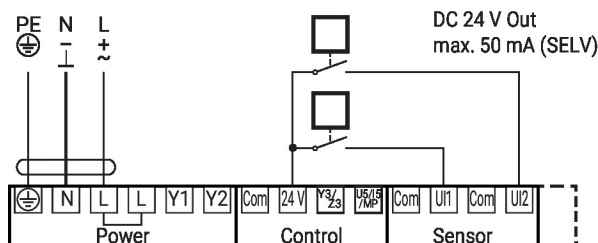


Switching contact requirements:

The switching contact must be able to switch a current of 10 mA at 24 V accurately.

To capture for example:

- Flow monitors
- Operation / malfunction messages of chillers

Connection of passive sensors (BACnet MS/TP / Modbus RTU / MP-Bus)

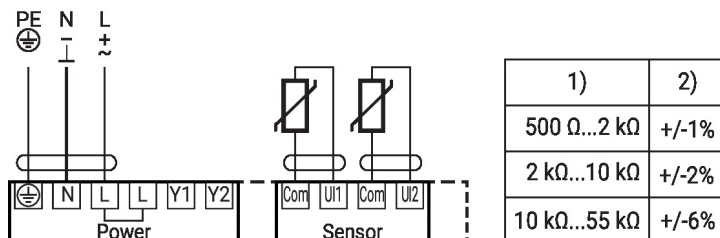

1)	2)
500 Ω...2 kΩ	+/-1%
2 kΩ...10 kΩ	+/-2%
10 kΩ...55 kΩ	+/-6%

1) Resistance range


2) Tolerance measured value

Compensation of the measured value is recommended

- Suitable for Ni1000 and Pt1000

- Suitable Belimo types 01DT-..

Operating controls and indicators

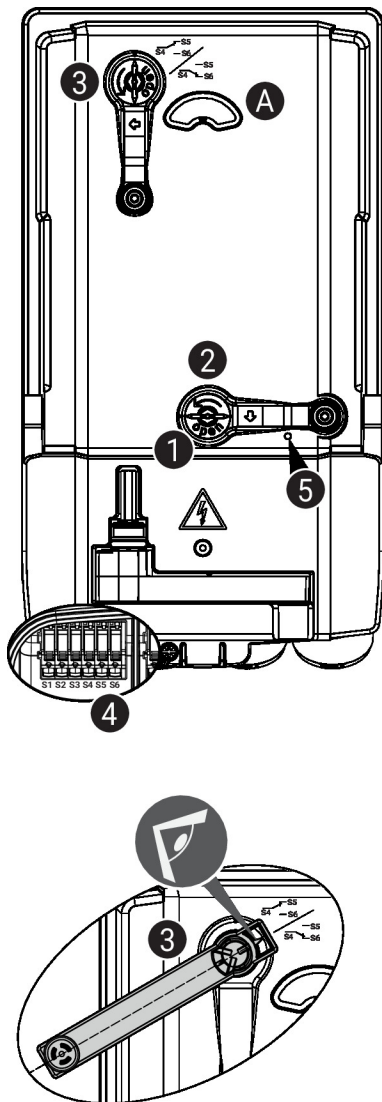

5 LED display green

Off: No power supply or malfunction
On: In operation

Auxiliary switch settings



Note: Perform settings on the actuator only in deenergised state.

For the auxiliary switch position settings, carry out points 1 to 4 successively.

1 Gear train disengagement

Opening the manual override cover and adjusting the hand crank.
Manual override is possible.

2 Manual override

Turn the hand crank until the desired switching position A is indicated and then remove the hand crank.

3 Auxiliary switch

For the auxiliary switch position settings, carry out points 1 to 4 successively.
Opening the auxiliary switch adjustment cover and adjusting the hand crank.
Turn the hand crank until the arrow points to the line.

4 Terminals

Connect continuity tester to S4 + S5 or to S4 + S6.
If the auxiliary switch should switch in the opposite direction, rotate the hand crank by 180°.

Service


Wireless connection Belimo devices marked with the NFC logo can be operated with Belimo Assistant 2.


Requirement:

- NFC- or Bluetooth-capable smartphone
- Belimo Assistant 2 (Google Play and Apple AppStore)

Align NFC-capable smartphone on the device so that both NFC antennas are superposed.

Connect Bluetooth-enabled smartphone via the Bluetooth-to-NFC converter ZIP-BT-NFC to the device. Technical data and operating instructions are shown in the ZIP-BT-NFC data sheet.

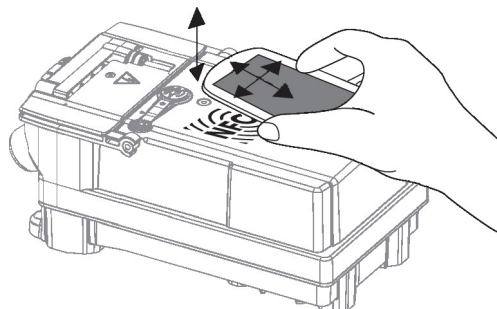

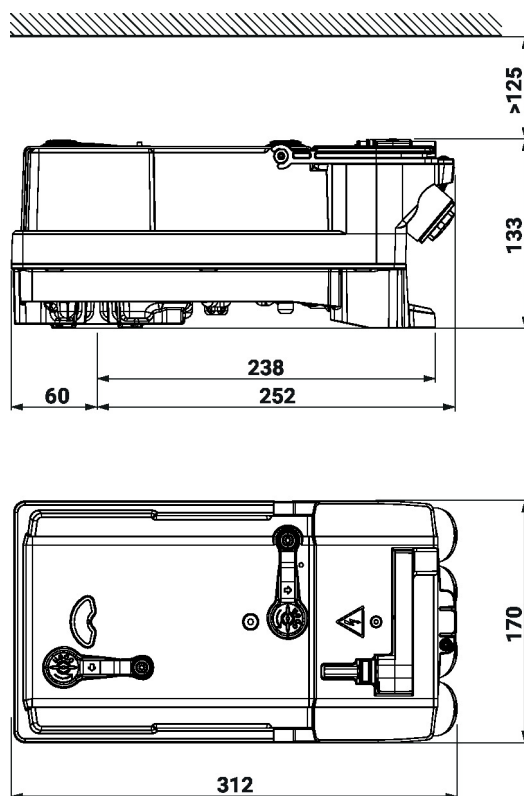Dimensions

Further documentation

- Tool connections
- BACnet Interface description
- Modbus Interface description
- Overview MP Cooperation Partners
- Introduction to MP-Bus Technology
- MP Glossary
- The complete product range for water applications
- Data sheets for butterfly valves
- Installation instructions for actuators and/or butterfly valves
- General notes for project planning
- Description Data-Pool Values
- Quick Guide – Belimo Assistant 2